

bio Bidet

Luxury Heated Toilet Seat with Warm Water Spray and Blow Dryer for the Ultimate in Cleanliness and Comfort



EASILY REPLACES MOST STANDARD TOILET SEATS



**Hydraulic
Seat & Lid**



Seat Sensor



Built in Filter



Heated Seat



Power Saving



Feminine Wash




Posterior Wash



Pulsation



Oscillation



Self-Cleaning



Air Drying



Quick Release

The first electronic bidet toilet seat approved by the Water Regulations Advisory Scheme




www.pdshygiene.com E-mail: info@pdshygiene.com

Tel: 01603 426700 Fax: 0800 014 8670



Specification	BB-800	BB-900	BB-1000	
Power Rating	Australia or Europe: 220 – 240V~, 50/60Hz, 600 – 700W America or Canada: 120Vac, 60Hz, 660W			
Water inlet type	Type	Direct Inlet flow type		
	Water inlet pressure	0.4 ~ 7.5 kgf/cm ² (5.69 psi ~ 106.7psi)		
Power cord	(1.2m (4 feet): AMERICA) / (1.8m:Australia or Europe)			
Wash Device	Posterior Wash	Max. 1.2 l / min (Max. 0.32 GPM)		
	Feminine Wash	Max. 1.2 l / min (Max. 0.32 GPM)		
	Water Pressure Adjustable	5 Levels		
	Warm Water Temperature	Room Temp ~ 40°C (Room Temp. 104°F)		
	Heater	600 W		
	Safety Devices	Thermal fuse, Thermal switch, Float switch		
Heated Seat	Temperature	Room Temp ~ 41°C (Room Temp. ~ 105.8°F)		
	Heater	55 W		
	Safety Device	Thermal fuse		
Warm Air Dryer Device	Adjustable Dry Temperature (Room Temp~45°C)			
	Heater (250W)	●	●	
	Safety Device (Thermal fuse, bimetal)			
Turbo & Enema Function	●	●	●	
Deodorizer	-	●	●	
Remote control	-	-	●	
Inlet water temperature	3°C ~ 35°C (37.4°F ~ 95°F)			
Ambient Temperature	3°C ~ 40°C (37.4°F ~ 104°F)			
Dimension	Elongated (Control)	Round (Control)	Elongated (Remote)	Round (Remote)
	W : 495mm (19.4 inch)	W : 495mm (19.4 inch)	W : 475mm (18.7 inch)	W : 475mm (18.7 inch)
	L : 525mm (20.6 inch)	L : 493mm (19.4 inch)	L : 525mm (20.6 inch)	L : 493mm (19.4 inch)
	H : 185mm (7.28 inch)	H : 185mm (7.28 inch)	H : 185mm (7.28 inch)	H : 185mm (7.28 inch)
Weight (kg)	5.3kg	5.4kg	5.2kg	

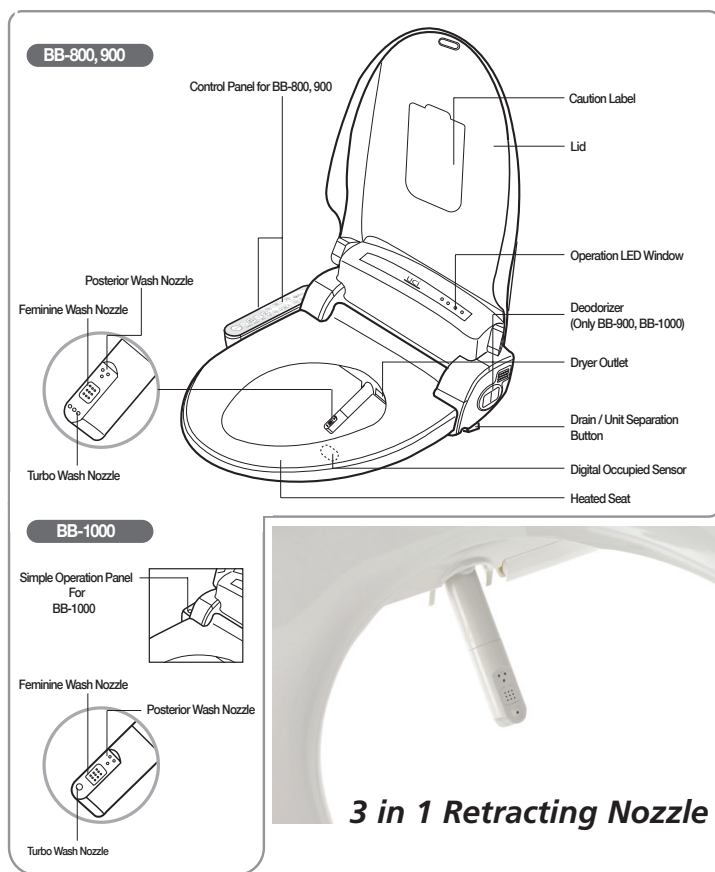

Features:

Side/Remote Control
 Heated Seat
 Power Saving
 Hydraulic Seat
 Seat Sensor
 Built in Filter
 3 in 1 Nozzle
 Feminine Wash
 Posterior Wash
 Turbo Wash
 Pulsating Massage
 Oscillation
 Self Cleaning
 Air Drying
 Self Diagnosis
 Quick Release

Convenient panel to control and operate the various functions
 Room Temp ~ 40°C
 Two economy options
 Gentle closing of seat and lid
 Signals that the seat is occupied to commence cleaning operation
 Protection against lime-scale build up
 Patented nozzle for 3 cleansing programs
 Soft aerated water spray for feminine cleansing
 Soft yet powerful aerated water spray for thorough cleansing
 Whirly mass of soft water spray to stimulate bowel movement
 Pulsating and soothing flow of soft water
 Oscillating movement of washing nozzle for thorough cleansing
 Automatic self cleaning of washing nozzle before and after use
 Powerful warm air-drying operation
 System warns user of any malfunctions
 Quick release mechanism to detach seat from toilet



PDS Hygiene (part of Precision Design Services Limited)
 Greyfriars, Greyfriars Close, Old Catton, Norwich NR6 7DX

Tel: 01603 426700 Fax: 0800 014 8670

www.pdshygiene.com E-mail: info@pdshygiene.com